

gLine instruments



new patterns now available!


gSource®

2 - table of contents/nerve probes

The gLine is a collection of modified or improved versions of standard instruments based on feedback received from surgeons and other healthcare professionals.

The gSource catalog offers a large selection and inventory of over 3,500 standard instruments.

Our catalog is available on-line at www.gSource.com, or call to request a copy.




Cover of the gSource catalog

We can also create custom instruments in a timely and economical manner. For an accurate quotation and delivery schedule, send us a sample, sketch, or drawing.

Table of Contents

nerve probes	2-3
hand-held retractors	3-6
self-retaining retractors	6-8
distractors	8-9
compressors	9
spreader	10
dissector	10
elevators	10-11
awl	12
bone holding forceps	12-13
dermal curette	14
bone curettes	14
osteotomes	15
gouge	15
mallets	15-16
impactors	16
graft holder	16
rasp	16
grasper rongeurs	17
spinal rongeurs	18
spinal punches	19-20
goniometers	20
nail splitter	20
pliers	21
wire twister	21
wire passer	21
rod bender	22
pin cutters	22
SQC handle	23
twist drills	23
extractors	23
instrument storage racks	24-27


OD = Outside Diameter



gS 25.2020 10 1/2", straight
gS 25.2025 10 1/2", curved

gProbe, Ball

2.3mm ball OD,
 graduation lines
 with 4" knurled handle




gS 25.2030 12", 90° angle

gProbe, Ball

2.6mm ball OD
 with 6" knurled handle



nerve probes/hand-held retractors - 3




45°

gS 25.2045 45° angle
gProbe, Nerve
15", blunt



90°

gS 25.2050 90° angle
gProbe, Nerve
15", blunt



gS 25.2200 8 1/4"
gSeparator, Penelope
3.2mm blunt, 90° angle
with 4" knurled handle




gS 36.6420 9 1/2"
gRetractor, Sandhu Nerve Root
3.2mm blunt, 90° angle
malleable




4 - hand-held retractors

WL = Working Length

WL

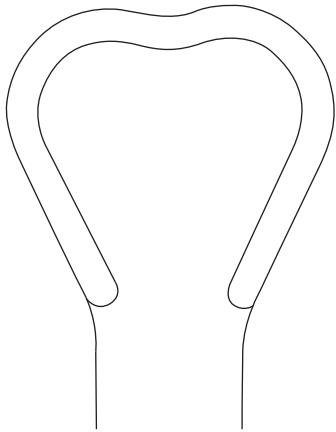

gS 36.3530

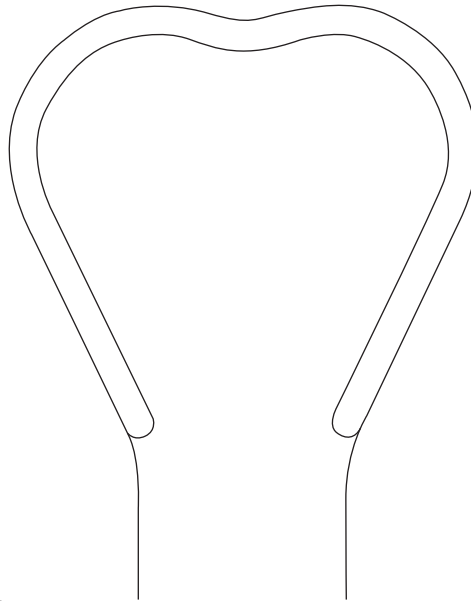

gS 36.3532


gS 36.3530 40mm wide blade x 5" WL
gS 36.3532 62mm wide blade x 5" WL

gRetractor, Harrington

12 1/2"
 with 5" blue silicone handle



OAL = Overall Length

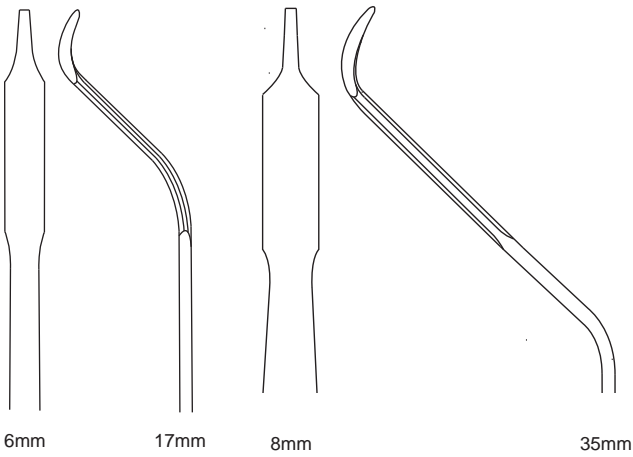

	OAL	Blade Width	Blade Drop
gS 36.9340	6 1/4"	6mm	17mm
gS 36.9345	6"	6mm	35mm
gS 36.9350	6 1/4"	8mm	17mm
gS 36.9355	6"	8mm	35mm



gRetractor, Hohmann Mini

with 12mm bent handle



hand-held retractors - 5

WL = Working Length

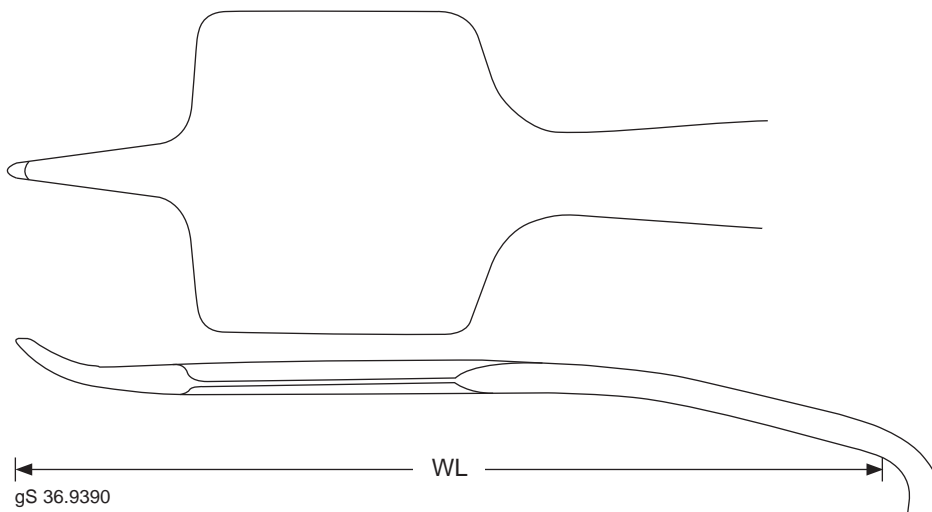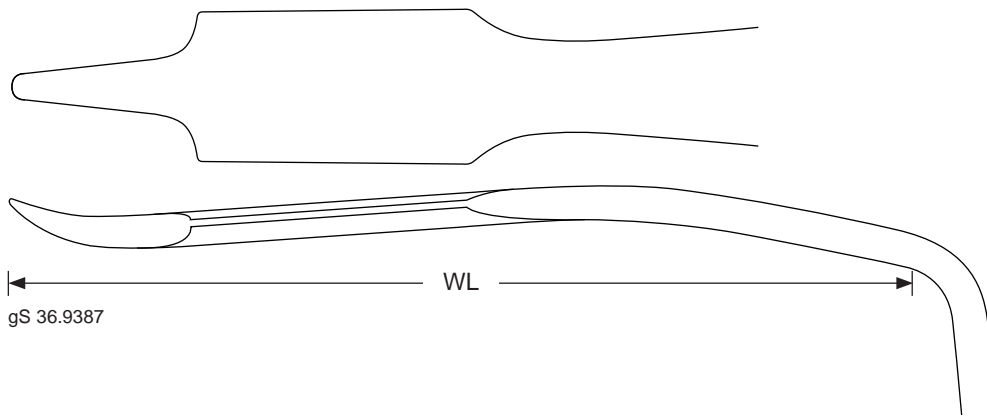

gS 36.9387 19mm wide blade x 4 3/4" WL

gS 36.9390 43mm wide blade x 4 3/4" WL


gRetractor, Bent Hohmann

6 3/4"

90° angle

rounded end


6 - hand-held and self-retaining retractors

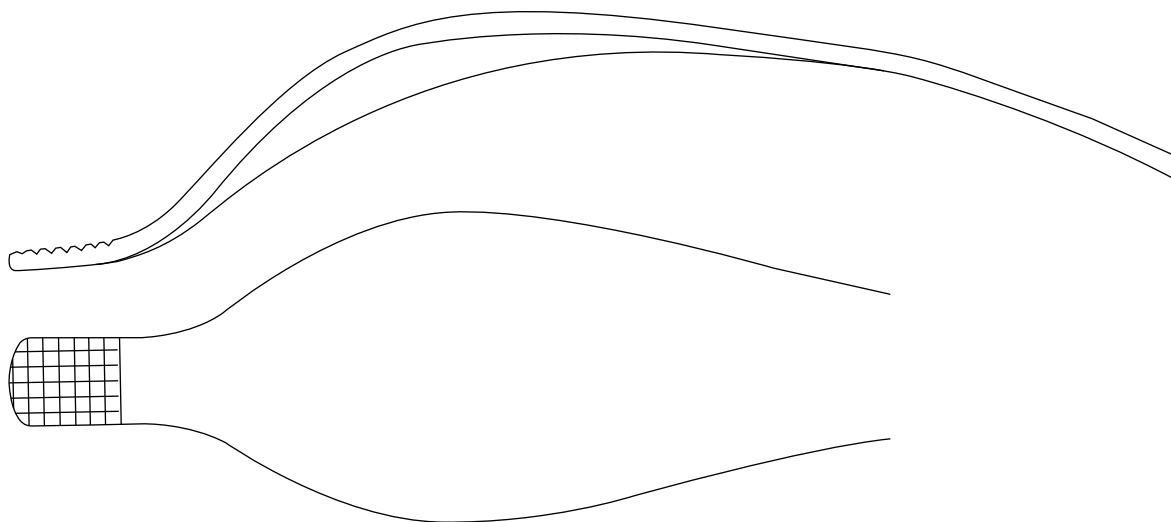

gS 37.3180 12"

gRetractor, Aufranc Cobra




40mm, blunt serrated
with grip handle



gS 38.5500 4 1/4"

gRetractor, Trigger Finger

6.5x12mm blade, blunt
1x1 blades

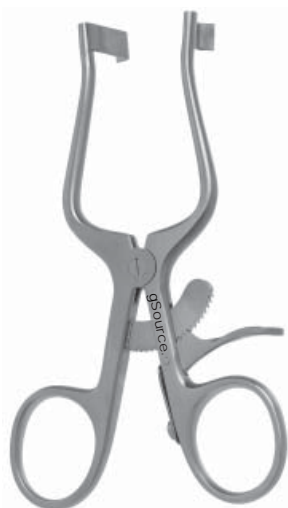


25mm, sharp

gS 38.5825 25mm depth, sharp
gS 38.5826 25mm depth, blunt
gS 38.5830 30mm depth, sharp
gS 38.5831 30mm depth, blunt




gRetractor, Weitlaner

4 1/2"
2x3 prongs

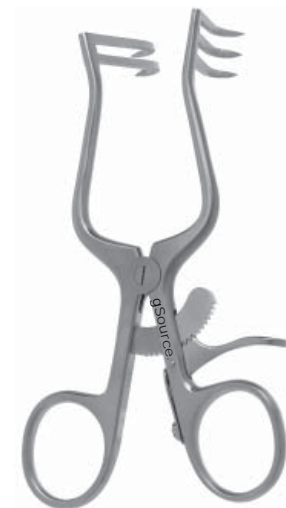

self-retaining retractors - 7

WL = Working Length

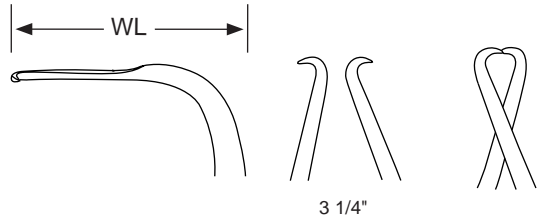



gS 38.8793 3 1/4", 7.5mm
gS 38.8795 4", 9.5mm

gRetractor, Johnson Neuroma
 90° angle, 1 1/4" WL



gS 40.3160 6"
gRetractor, Rahner
 20mm cross serrated outside blade, angled

OD = Outside Diameter

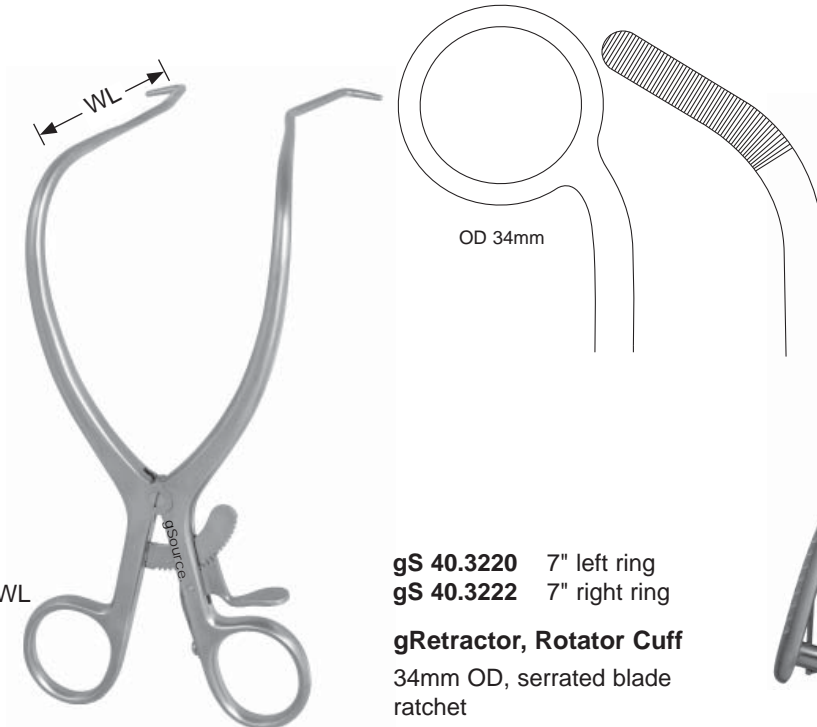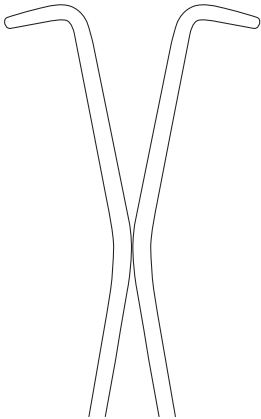


gS 40.8670 7 3/4", 4 1/2" WL
gRetractor, Deep Gelpi
 90° angle
 1x1 blunt points

gS 40.3220 7" left ring
gS 40.3222 7" right ring
gRetractor, Rotator Cuff
 34mm OD, serrated blade ratchet



8 - self-retaining retractors/distractors




Useful in facilitating a lateral release during bunionectomy procedures.

3mm-30mm calibrations marked on bottom side of ratchet help to measure and assess the width needed for the lateral portion of the bone graft.



gS 40.3150 5 1/2"

gRetractor, Abramsohn
serrated outside blades
calibrated ratchet

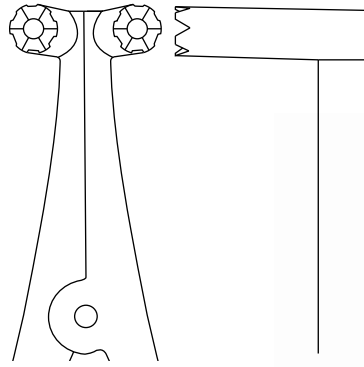

gS 40.1100 6"

gDistractor
with guides, calibrated ratchet
max cap 2.4mm [3/32"]

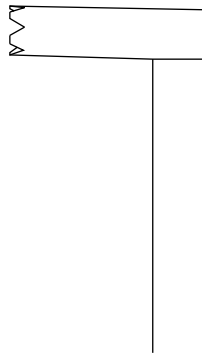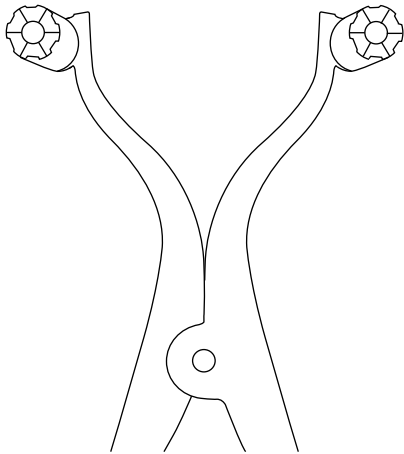


gS 40.1120 6"

gDistractor, Open
with guides, calibrated ratchet
max cap 2.4mm [3/32"]



distractors/compressors - 9




gS 40.3555 10"

gDistractor, MIS
for 5.5mm diameter rods
ratchet




gS 40.3565 11"

gCompressor, MIS
for 5.5mm diameter rods
ratchet

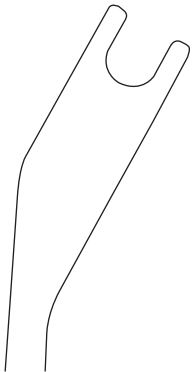

gS 40.3655 13"

gDistractor, Parallel
for 5.5mm diameter rods
ratchet

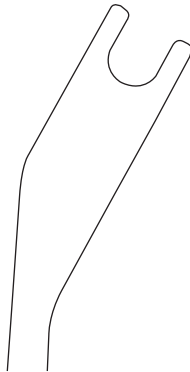


gS 40.3665 13"

gCompressor, Parallel
for 5.5mm diameter rods
ratchet



10 - spreader/dissector/elevators

Useful in facilitating a lateral column lengthening of the calcaneus.




gS 40.3490 4 1/2"

gSpreader, Calcaneal

10mm serrated outside blade
1 1/4" opening




Useful in facilitating a discectomy in anterior lumbar fusion and non-fusion procedures.



gS 43.9286 10 1/2"

gDissector

6mm, blunt, slight curve
with 6" knurled handle

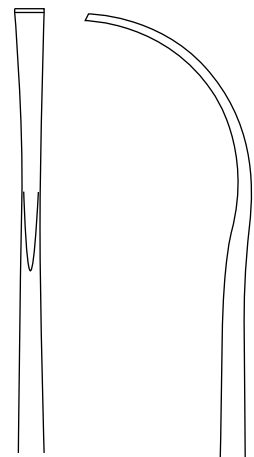


gS 43.9260 8 1/2"

gElevator, Ganz

curved
with 5" knurled handle



Tip detail not to scale.

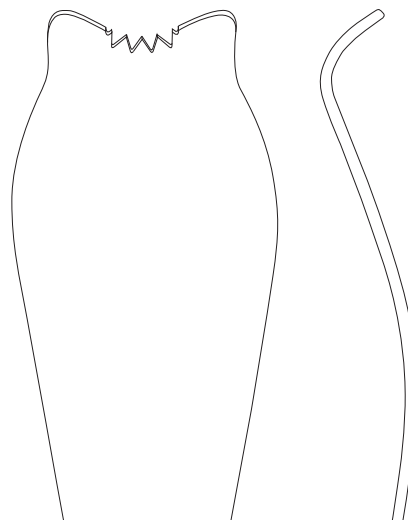


gS 43.9420 13"

gElevator, Femoral Neck

70mm blade
with 4 1/2" knurled handle



Tip detail not to scale.

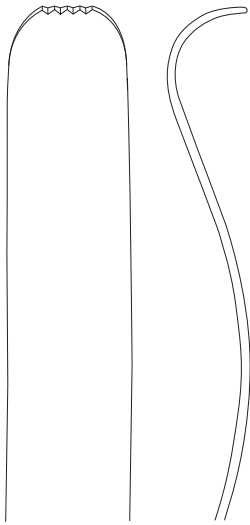


gS 43.9425 15"

gElevator, Femoral Neck
31mm blade
with 7" knurled handle



Tip detail not to scale.

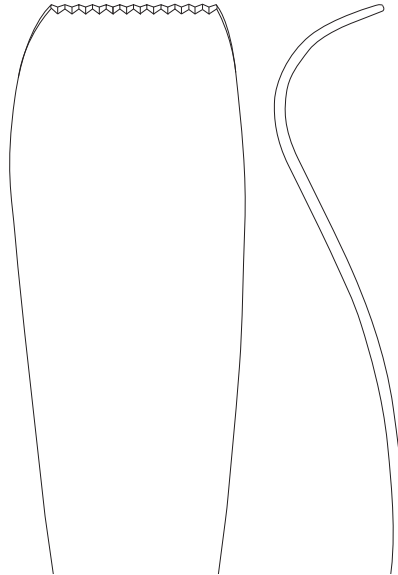


gS 43.9428 16"

gElevator, Femoral Neck
56mm blade
with 8 1/2" knurled handle



Tip detail not to scale.

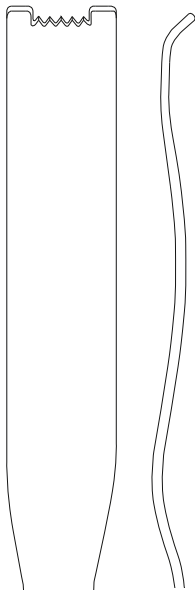


gS 43.9438 17 1/2"

gElevator, Femoral Neck
38mm blade
with 9" knurled handle



Useful in facilitating a discectomy in anterior lumbar fusion and non-fusion procedures. Double handed grip provides maximum control.

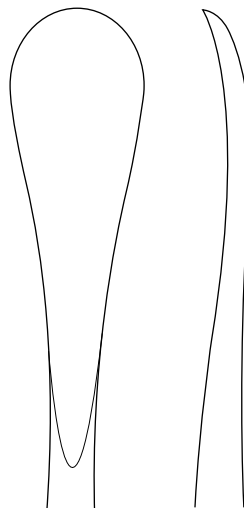

gS 43.9817 17", curved

gElevator, Bone, Double Handed
17mm blade, sharp
with 9" plastic handle, black




12 - awl/bone holding forceps



gS 44.4513 10"

gAwl


5" shaft, 1/2" sharp point
with 4 1/2" phenolic handle



gS 46.2305 6 3/4"

gForceps, Lewin Bone


30° angled
ratchet



gS 46.2332 6"

gForceps, Bone Reduction

30mm max opening
long double ratchet



gS 46.2333 6"


gForceps, Bone Reduction

30mm max opening, heavy tips
long double ratchet




bone holding forceps - 13

OAL = Overall Length
OD = Outside Diameter



gS 47.6020




gS 47.6030

	OAL	OD Ball Tips
gS 47.6020	5 1/2"	2.0mm
gS 47.6030	6 1/2"	3.0mm

gClamp, Bone Fragment

ball tips, curved
speedlock

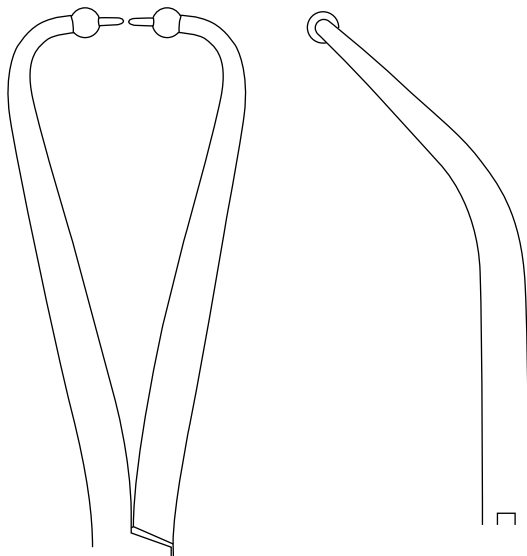

gS 47.6040 8"

gClamp, Bone Fragment

4.0mm OD ball tips, curved
speedlock



14 - dermal and bone curettes

Useful in facilitating verruca removal in podiatric procedures.



3.0x4.0mm




gS 50.5930 5 1/2"

gCurette, Excavator

3.0x4.0mm
double ended with holes

Useful in facilitating a discectomy in anterior lumbar fusion and non-fusion procedures. Double handed grip provides maximum control. Angled curettes allow access to posterolateral corners.

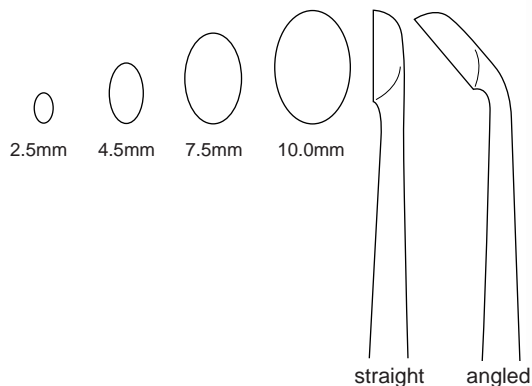


straight	angled	
gS 51.7802	gS 51.7812	18", 2.5mm
gS 51.7804	gS 51.7814	18", 4.5mm
gS 51.7807	gS 51.7817	18", 7.5mm
gS 51.7810	gS 51.7820	18", 10.0mm

gCurette, Double Handed

oval cups
with 9" plastic handle, black



Useful in facilitating a discectomy in anterior lumbar fusion and non-fusion procedures. Double handed grip provides maximum control.

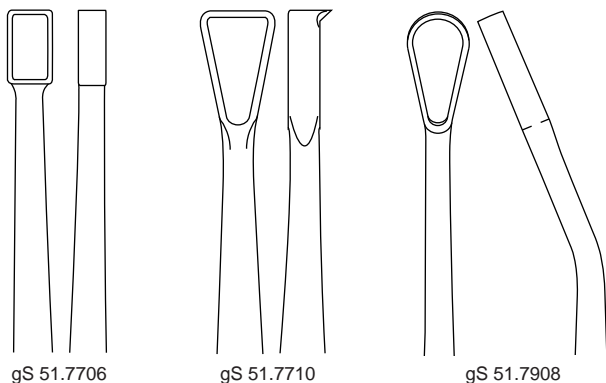

gCurette, Box

gS 51.7706 17", straight, 6mm, sharp/blunt

gCurette, Triangle

gS 51.7710 17", straight, 10mm, sharp/blunt

gCurette, Teardrop Ring

gS 51.7908 17", angled, 8mm, sharp/sharp

gCurette, Double Handed

fenestrated cups
with 9" plastic handle, black




gS 51.7706

gS 51.7710


gS 51.7908

osteotomes/gouge/mallets - 15

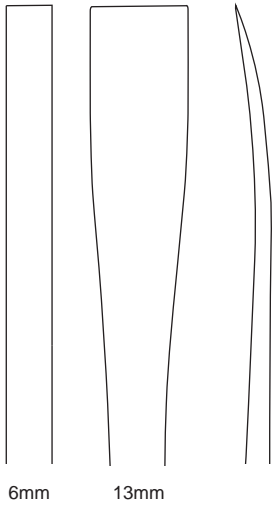


gS 52.4870 6mm
gS 52.4873 13mm

gOsteotome, Hibbs
 9 1/2" curved
 with 5" hollow handle

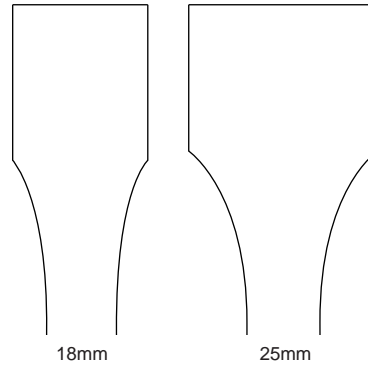

gS 53.7918 17", straight, 18mm
gS 53.7925 17", straight, 25mm

gOsteotome, Double Handed
 with 9" plastic handle, black

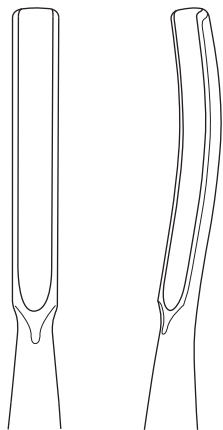

gS 56.1020 9 1/2"
gGouge, Tanaka
 6mm curved
 with 6" phenolic handle



Stainless steel head with
 nylon caps.

Biocompatible silicone handle
 helps to prevent slippage
 and provide a secure grip.

gS 59.8800 8 1/2"
gMallet
 weight: 9.2oz [260g]
 head diameter: 25mm
 with 5" silicone handle, green



16 - mallets/impactors/graft holder/rasp

Using gentle force, can be utilized as a slaphammer with an extractor device to assist with removal of implants.

Stainless steel head with nylon cap.



Biocompatible silicone handle helps to prevent slippage and provide a secure grip.

13mm slot opening.

gS 59.8810 8 1/2"

gMallet, Slotted


weight: 1lb 5oz [584g]
head diameter: 35mm
with 5" silicone handle, green



gS 60.0600 6 1/4"

gImpactor, Hibbs Bone

3/8" x 3/4", serrated head




gS 60.2764 10"

gGraft Holder/Impactor Forceps, Bone

6.4mm cross-serrated impactor
plain serrated inside



Useful in facilitating a discectomy in anterior lumbar fusion and non-fusion procedures. Double handed grip provides maximum control.





gS 62.9910 17", straight

gRasp, Double Handed

10x20mm, plain and cross serrated
with 9" plastic handle, black



Grooved jaw and ratchet help to provide a fixed hold on grasped tissue.



top
jaw



bottom
jaw



gS 68.9805 9", straight

gGrasper Rongeur

5mm, grooved jaw, ratchet
Ferris-Smith Kerrison handle 5"



Grooved jaw helps to provide a secure grasp on tissue.



top
jaw



bottom
jaw

gS 68.9815 9", straight



gGrasper Rongeur

5mm, grooved jaw
Ferris-Smith Kerrison handle 5"




18 - spinal rongeurs

Useful in facilitating a discectomy in anterior lumbar fusion and non-fusion procedures.



gS 68.9824



gS 68.9844



non-serrated

gS 68.9824 13", straight 4mm

gS 68.9826 13", straight 6mm

serrated

gS 68.9843 13", up 3mm



gS 68.9844 13", up 4mm

gS 68.9848 13", up 7.5mm

gRongeur, Disc

non-serrated straight and serrated up jaws
 Ferris-Smith-Kerrison handle 5"

Biocompatible silicone coated handles help to prevent slippage and provide a secure grip.

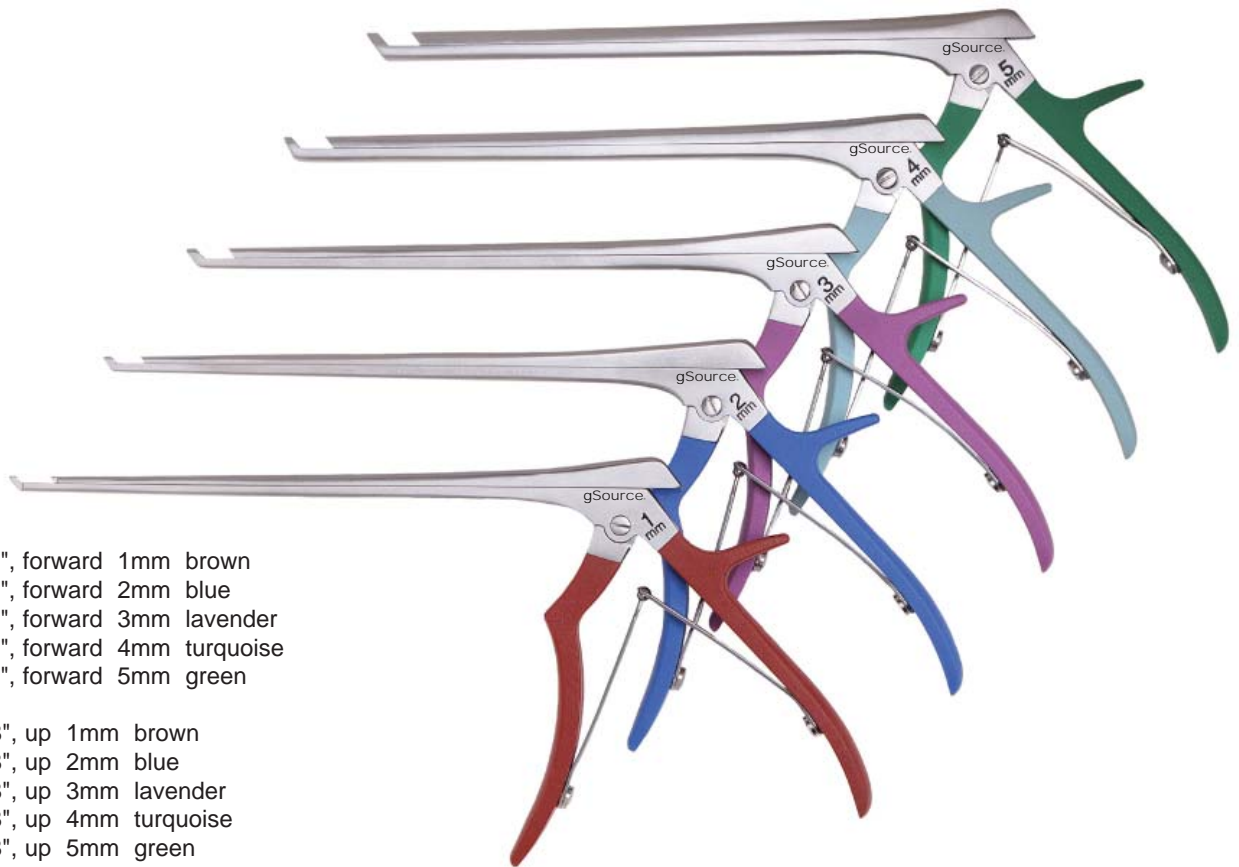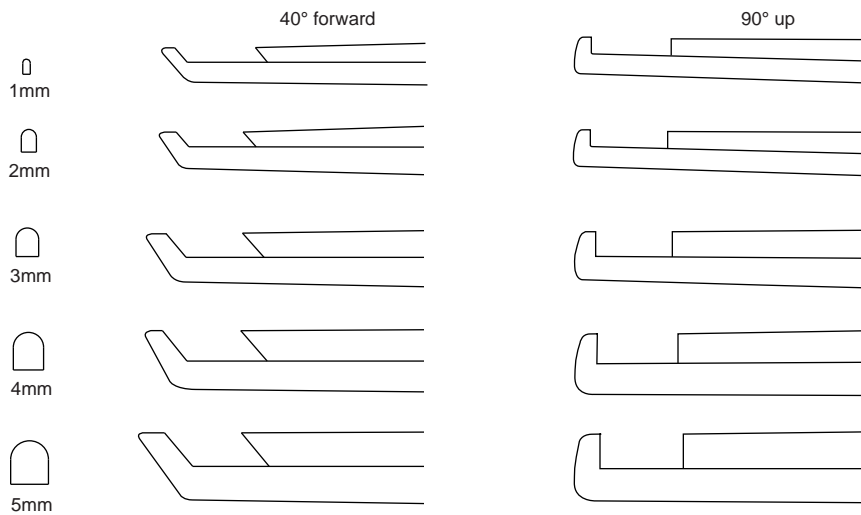

- gS 72.8011** 8", forward 1mm brown
- gS 72.8012** 8", forward 2mm blue
- gS 72.8013** 8", forward 3mm lavender
- gS 72.8014** 8", forward 4mm turquoise
- gS 72.8015** 8", forward 5mm green


- gS 72.8021** 8", up 1mm brown
- gS 72.8022** 8", up 2mm blue
- gS 72.8023** 8", up 3mm lavender
- gS 72.8024** 8", up 4mm turquoise
- gS 72.8025** 8", up 5mm green

gPunch, Silicone Coated Handle

regular foot plate
 Ferris-Smith-Kerrison handle 5"

20 - spinal punches/goniometers/nail splitter

Useful in facilitating a discectomy in anterior lumbar fusion and non-fusion procedures.

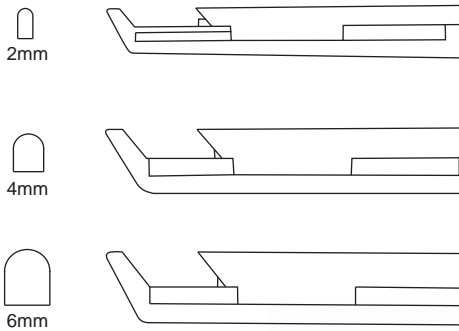


- gS 70.6302** 13", forward 2mm with bone ejector
- gS 70.6304** 13", forward 4mm with bone ejector
- gS 70.6306** 13", forward 6mm with bone ejector

gPunch, Spurling Kerrison

regular foot plate
Ferris-Smith-Kerrison handle 5"



- gS 74.2180** 8"
- gS 74.2190** 11 1/2"
- gGoniometer**
- 180°



Tapered jaw nail splitters have fine pointed tips for splitting thin nails only. If used as a nail nipper on thick nails, delicate tips can become damaged.

- gS 77.6105** 5 1/2"

gNail Splitter


tapered jaw
straight, locking clip
smooth handles




pliers/wire twister/wire passer - 21

Replaceable PEEK inserts on jaws helps to eliminate metal-to-metal contact.

Helps to grasp an implant, or other delicate materials and devices, without scratching or impairing the surface.



gS 81.3630 8"
gPliers, Slip Joint
 with PEEK inserts







For twisting cerclage wire.

Biocompatible silicone handle helps to prevent slippage and provide a secure grip.



gS 82.4200 6 1/2"
gWire Twister
 max cap 1.5mm [17 gauge]
 with 5" green silicone handle

OD = Outside Diameter

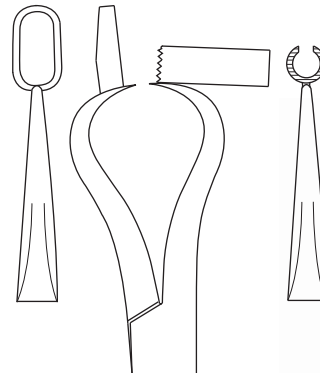

- 1-2. Serrated end of drill guide helps with fixation of drill hole positioning and provides soft tissue protection during drilling.
3. Drill guide helps to guide cerclage wire through the hole and into the fenestrated loop on the other side.
4. After wire passes through fenestrated loop, forceps are opened and wire can be easily pulled up from other side.

gS 82.4970 6"
gWire Passer and Retriever Forceps
 with drill guide for max OD 3.0mm drill bit
 max cap 1.5mm [17 gauge] cerclage wire




22 - rod bender/pin cutters

OD = Outside Diameter


Bends rods up to 6mm with three different cam settings.

Separate reduction ring not required.

Adjustable center cam is spring loaded.

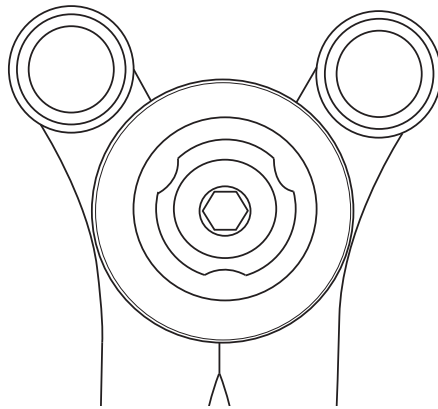

detached




attached

gS 82.7690 19"

gRod Bender, Universal

for rods up to 6mm [.236"] OD
with 15 1/2" detachable handles


DA = Double Action

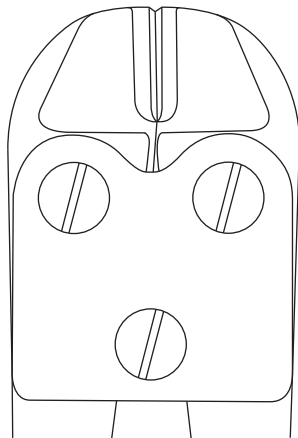

gS 83.8880 9"

gPin Cutter DA Angled

max cap 2.8mm [7/64"]
tungsten carbide inserts

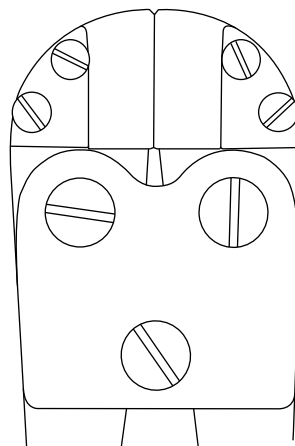

Silicone inserts are designed to hold the remnant piece of wire for safe disposal after cutting.

gS 83.8882 9"

gPin Cutter DA Angled

max cap 2.8mm [7/64"]
tungsten carbide inserts
with silicone inserts

SQC handle/twist drills/extractors - 23

SQC = Small Quick Coupling
 ID = Inside Diameter
 OD = Outside Diameter
 FL = Flute Length

gS 86.0050 4 1/2"

gHandle, SQC

cannulated, max ID 2.4mm
 with 3" plastic handle, black



4.5mm

	OD	Max ID	FL
gS 86.8620	2.0mm	1.2mm	25mm
gS 86.8627	2.7mm	1.3mm	25mm
gS 86.8635	3.5mm	1.8mm	35mm
gS 86.8640	4.0mm	2.0mm	35mm
gS 86.8645	4.5mm	2.1mm	40mm

gDrill, Twist

5", straight shank
 4 flutes, cannulated
 round end



gS 87.0200 8"

gExtractor, Screw

counter clockwise thread
 TiN coated tip
 SQC end





gS 87.4080 8 1/2"

gExtractor, Femoral Head

with T-handle



24 - instrument storage racks



K-Wires 4" - diameters					K-Wires 6" - diameters				
0.7mm [.028"]	0.9mm [.035"]	1.1mm [.045"]	1.4mm [.054"]	1.6mm [.062"]	0.7mm [.028"]	0.9mm [.035"]	1.1mm [.045"]	1.4mm [.054"]	1.6mm [.062"]
78.2000	78.2010	78.2020	78.2040	78.2030	78.1210	78.1220	78.1230	78.1240	78.1250
				78.4210					78.4230
78.2300	78.2310	78.2320	78.2330	78.2340	78.2800	78.2810	78.2820	78.2840	78.2850
				78.9110					78.9114
				78.4080					78.4090
78.3000	78.3010	78.3020	78.3030	78.3040	78.1300	78.1310	78.1320	78.1340	78.1330
78.3300	78.3310	78.3320	78.3330	78.3340	78.3350	78.3360	78.3370	78.3380	78.3390

gSource K-Wires are sold separately in non-sterile packages of 6 each. They are precision ground from certified implant stainless steel and have smooth tapered points which are expertly machined for easier penetration.

See above chart for quick reference. Please inquire about the availability of any size and style not shown on this page or visit www.gSource.com.

Rack folds to close for convenient storage. When opened, it converts to a table top stand for use in O.R.



Closed position for storage.
8 3/4" x 5 1/2" x 1 1/2"

gS 98.5404 8 3/4"
anodized aluminum









gRack, K-Wire


holds 4" and 6" k-wires, 6 each (sold separately)
0.7mm to 1.6mm [.028" to .062"]



Open position
as a table top
stand.
Loaded

instrument storage racks - 25

K-Wires 9" - diameters					Steinmann Pins 9" - diameters											
0.7mm [.028"]	0.9mm [.035"]	1.1mm [.045"]	1.4mm [.054"]	1.6mm [.062"]	2.0mm [5/64"]	2.4mm [3/32"]	2.8mm [7/64"]	3.2mm [1/8"]	3.5mm [9/64"]	4.0mm [5/32"]	4.5mm [.177"]					
 Double Trocar-Smooth					78.2105	78.2110	78.2120	78.2140	78.2130	78.5500	78.5530	78.5560	78.5590	78.5620	78.5650	78.5680
 Double Trocar-Full Thread									78.4030	78.8500	78.8530	78.8560	78.8590	78.8620	78.8650	78.8680
 Single Trocar-Smooth					78.2500	78.2510	78.2520	78.2540	78.2530	78.6100	78.6130	78.6160	78.6190	78.6220	78.6250	78.6280
 Single Trocar-Threaded									78.9116	78.8700	78.8730	78.8760	78.8780	78.8820	78.8850	78.8880
 Double Diamond-Smooth					78.3100	78.3110	78.3120	78.3140	78.3130	78.7000	78.7030	78.7060	78.7090	78.7120	78.7150	78.7180
 Double Diamond-Full Thread										78.8300	78.8330	78.8360	78.8390	78.8420	78.8450	78.8480
 Single Diamond-Smooth					78.3400	78.3410	78.3420	78.3440	78.3430	78.7780	78.7630	78.7660	78.7690	78.7720	78.7750	78.7782
 Single Diamond-Threaded										78.8000	78.8030	78.8060	78.8090	78.8120	78.8150	78.8180

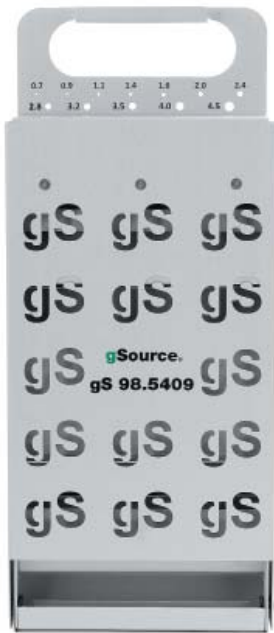

Closed position for storage.
12 1/2" x 5 1/2" x 1 1/2"

gS 98.5409 12 1/2"
anodized aluminum

gRack, K-Wire and Pin

holds 9" k-wires and pins, 6 each (sold separately)
0.7mm to 4.5mm [.028" to .177"]

gSource K-Wires are sold separately in non-sterile packages of 6 each. They are precision ground from certified implant smooth steel and have smooth tapered points which are expertly machined for easier penetration.

See above chart for quick reference. Please inquire about the availability of any size and style not shown on this page or visit www.gSource.com.

Rack folds to close for convenient storage. When opened, it converts to a table top stand for use in O.R.



Open position as a table top stand.
Loaded

26 - instrument storage racks

SQC = Small Quick Coupling
OAL = Overall Length

Rack folds to close for convenient storage. When opened, it converts to a table top stand for use in O.R.

Rack holds 1 each of the following gSource part numbers:

SQC Handle		OAL
gS 86.0040 black plastic and stainless steel		4 1/2"
SQC Star Bits	Size	OAL
gS 86.1604	T4	3 1/2"
gS 86.1608	T8	3 1/2"
gS 86.1715	T15	3 1/2"
gS 86.1725	T25	3 1/2"
SQC Hex Bits	Diameter	OAL
gS 86.1915	1.5mm	3 1/2"
gS 86.1925	2.5mm	3 1/2"
gS 86.1935	3.5mm	3 1/2"
gS 86.1940	4.0mm	3 1/2"


gS 98.4050 5 3/4"
anodized aluminum

gRack, Screwdriver Bits SQC

holds 4 SQC star bits, 4 SQC hex bits, 1 SQC handle
1 each (sold separately)



Closed position for storage.
5 3/4" x 7 1/4" x 1 1/4"
Empty

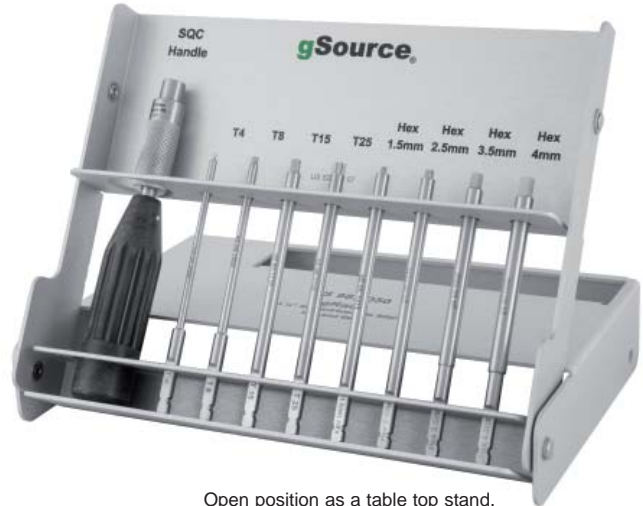

Open position as a table top stand.
Loaded

Rack folds to close for convenient storage. When opened, it converts to a table top stand for use in O.R.

Drill bit diameter and reorder numbers are marked inside rack for easy identification.

Rack holds 1 each of the following gSource part numbers:

	Diameter	OAL
gS 86.8211	1.1mm	60mm
gS 86.8215	1.5mm	85mm
gS 86.8220	2.0mm	100mm
gS 86.8222	2.2mm	110mm
gS 86.8226	2.5mm	110mm
gS 86.8228	2.7mm	125mm
gS 86.8235	3.5mm	110mm

gS 98.8178 7"
stainless steel

gRack, SQC Twist Drill

holds 7 SQC twist drills, 1 each (sold separately)
1.1mm to 3.5mm [.045" to 9/64"]



Closed position for storage.
7" x 4 1/4" x 3/4"
Empty



Open position as a table top stand.
Loaded

Nylon coated brackets help avoid metal-to-metal contact.

Side arms stay locked to prevent currettes from falling out.

Rack holds any 12 of the following gSource part numbers:

	cup width	straight	angled
#5/0	2.2mm	gS 51.6110	gS 51.6400
#4/0	2.5mm	gS 51.6120	gS 51.6401
#3/0	2.8mm	gS 51.6130	gS 51.6402
#2/0	3.3mm	gS 51.6150	gS 51.6403
#0	3.7mm	gS 51.6170	gS 51.6404
#1	4.3mm	gS 51.6190	gS 51.6410
#2	4.8mm	gS 51.6210	gS 51.6420
#3	5.6mm	gS 51.6230	gS 51.6430
#4	6.1mm	gS 51.6250	gS 51.6440
#5	6.7mm	gS 51.6290	gS 51.6450
#6	8.8mm	gS 51.6310	gS 51.6460

gS 98.6020 10"
anodized aluminum, stainless steel latches

gRack, Brun Currettes

holds 12 7" Brun currettes, (sold separately)
#5/0 to #6 [2.2mm - 8.8mm]



Closed position for storage.
10" x 8" x 2 3/4"
Empty

Open position as a table top stand.
Loaded

Nylon coated brackets help avoid metal-to-metal contact.

Side arms stay locked to prevent osteotomes from falling out.

Rack holds 2 each of the following tip widths:

	tip width	straight	curved
1/4"	[6mm]	gS 52.4040	gS 52.4280
1/2"	[13mm]	gS 52.4060	gS 52.4290
3/4"	[19mm]	gS 52.4100	gS 52.4300
1"	[25mm]	gS 52.4140	gS 52.4310
1 1/4"	[32mm]	gS 52.4180	gS 52.4320
1 1/2"	[38mm]	gS 52.4220	gS 52.4330

gS 98.6040 12"
anodized aluminum, stainless steel latches

gRack, Lambotte Osteotomes

holds 12 9" Lambotte osteotomes (sold separately)
6mm to 38mm [1/4" to 1 1/2"]



Closed position for storage.
12" x 6" x 3 1/2"
Empty

Open position as a table top stand.
Loaded

gSource

gSource is committed to putting the finest instruments into the hands of surgeons and their teams.

Not all instruments are created equal. Adequate for the job is, in reality, inadequate. A better instrument reduces distractions and facilitates operations. A better instrument helps a surgeon perform at his/her best. A better instrument leads to better results. gSource provides better instruments.

Orthopedic Focus

We are more than a source for quality instrumentation. gSource is an advocate for the orthopedic community. We can be relied upon to provide superior instrumentation for spinal and orthopedic procedures, and do so in a time critical fashion.

gSource Instrument Attributes

Whether crafted from German surgical stainless steel, or machined from U.S. surgical stainless steel, our instruments are recognized by their finely finished surface. They are designed to perform with precise surgical function and are also conceived to be affordable. It is this combination that distinguishes the gSource brand.

gSource Verified Quality

Every gSource instrument must pass detailed Quality Assurance tests before it can be sold. Instruments are tested for quality of material, workmanship, function, pattern consistency and critical dimensions.

Instrument reSource

The gSource catalog contains 3,500 instruments primarily used in orthopedic and spinal procedures. To view our catalog or for a quick answer on availability of other patterns, contact Apiary Medical, Inc. Please inquire about the availability of any instrument not shown in the catalog.

Custom Instrumentation

We will create entirely new instruments in a timely and economical manner. For an accurate quotation and delivery schedule, send us a drawing, sketch or sample.

Ordering gSource Instruments

For more information, please contact:

Apiary Medical, Inc.
12711 Big Bend Way
Valley Center, CA 92082

P 800.561.6692
F 800.561.2160
E cserv@apiarymedical.com
www.apiarymedical.com

VA/FSS Contract #: V797P-4050b

Contract Period: Nov. 1, 2012 through Oct. 31, 2017

DUNS #: 17-078-0295

Tax ID #: 20-1006137

Service First

Your inquiries will be answered quickly and accurately by knowledgeable professionals.

Trusted Supplier to World Leaders

Many world leaders and innovators in orthopedics and spine have found in gSource a trusted and reliable partner. We provide superior instrumentation in a time-critical fashion and at realistic prices.

Guarantee

All standard instruments are guaranteed for life against manufacturing defects of material and workmanship. Any instrument proving to be defective will be replaced or the purchase price refunded.

1. Tungsten carbide inserts are guaranteed for three years. Replaceable parts, other than springs, are guaranteed for one year. Replaceable springs are guaranteed for life against manufacturing defects of material and workmanship.
2. This guarantee is void if instruments are altered or not maintained or repaired properly or if they are not used for their intended surgical purpose.
3. Any unused instrument may be returned for full credit within 90 days of invoice date.

gSource Advantages

- On-time delivery
- Realistic price
- Verified quality
- German craftsmanship
- Precise U.S. machining
- Orthopedic and spinal focus
- Product development support
- CAD support
- Custom labeling, packaging and marking
- Large selection and inventory
- Adaptability/flexibility
- Superior customer service
- Full satisfaction guarantee



ISO 13485: 2003 Certified
FS 589741
FDA Registered



gSource, LLC Founded 1999

To order call 800.561.6692
Apiary Medical, Inc.